

SUNF

2015-2016 TIRES
RIMS



ATV TIRES / MOTOCROSS TIRES / KART TIRES /
GOLF CART TIRES / LAWN MOWER & SNOW
THROWER TIRES / SCOOTER & MOTORCYCLE
TIRES / TRAILER TIRES / RIMS



Taizhou Taiyangfeng Rubber Co., Ltd. is a professional manufacturer of tires & rims in China.

Our products mainly include: Tires for ATV; Tire for Motocross; Tires for kart; Tires for golf cart; Tires for lawn mower; Tires for snow thrower; Tires for scooter; Tires for motorcycle; Tires for trailer; rims, etc. At present, we have about 300 different kinds of item for customers to choose. Our brand "SUN F" achieve high reputation in the market. The annually output of our company is more than 1.2 million sets of tire & rim.


We develop new products constantly through our own R & D combine with high technology institutions, as well as feedback from customers. At the same time, we invited famous manage masters to organize and update science & modern management in the corporation, which bring up a great deal of qualified staff in our company. Moreover, we have whole set advanced produce and quality control equipment. We gained certificate of ISO9001-2000, CCC, E4 and DOT.

The business guideline of our company is

- Customers are our vital wealth
- Quality is our eternal pursuit
- Keeping innovation and exploit
- Mutual developing with clients

Warmly welcome you who come from domestic or oversea to cooperate with us!

01	COMPANY PROFILE	23	TRAILER TIRES
05	ATV TIRES	25	LAWN MOWER TIRES
19	KART TIRES	27	SNOW THROWER TIRES
20	MOTOCROSS TIRES	28	GOLF CART TIRES
21	SCOOTER TIRES	29	RIM SERIES

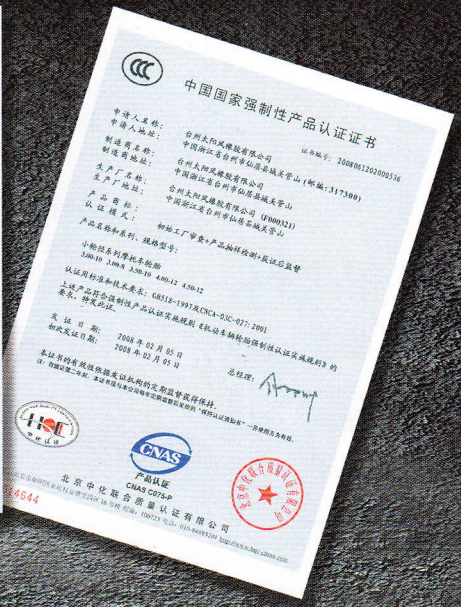


Awarded ISO9001 Certification

China Compulsory Certification



DOT approval from the United States Department of Transportation

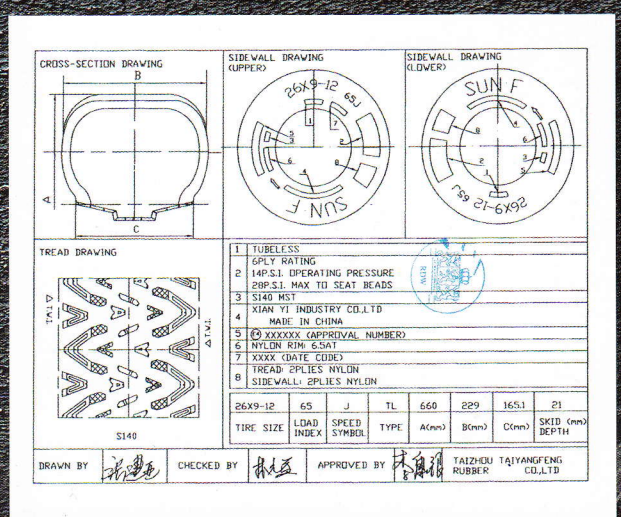


E-marking certificate from the European Economy Community

CHAMPION

ONLY ONE
WE'VE GONE



Desert, forest, sand land, wetlands, mud
Nothing can stop my forward momentum,
Complete SUN.F tire safety performance
I have a grasp ahead of the competition,
There is only one winner, it only belong to me!

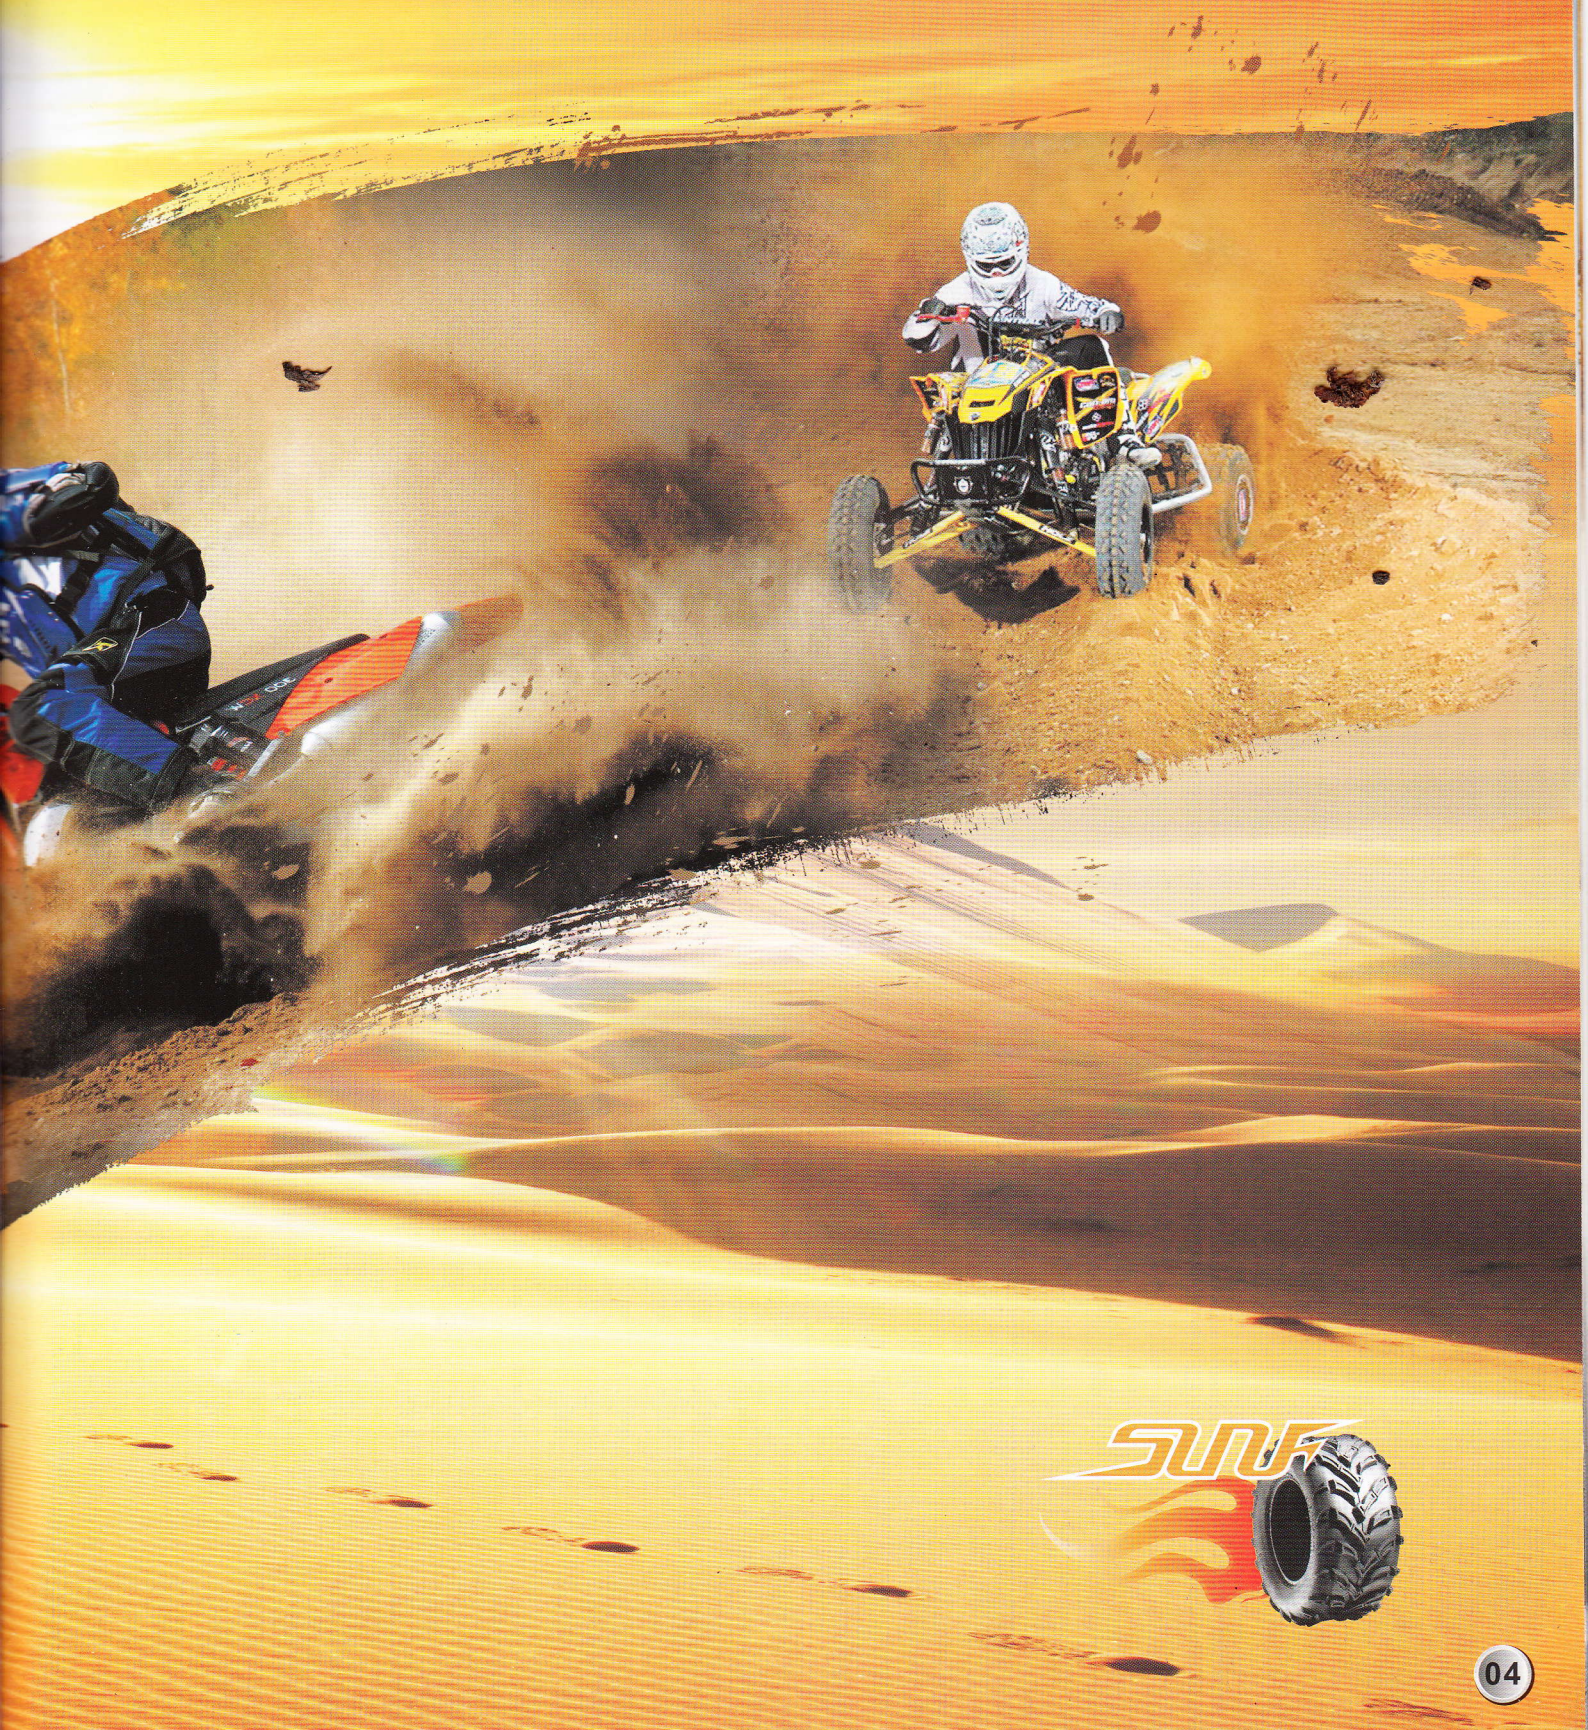

ISO9001:2000 CCC DOT E4

ATV TIRES



Lead incomparable, show the quality.
The SUN.F tire, consider people in the basic, take the high level science and technology to go into the tire essence, comply with the international quantity standard to ensure your safety completely. The durability; anti-puncture ability and safety of SUN.F tire is the leading one in the tire industry.

A-035F/R

ATV TIRES



MODEL	A-035F	
SIZE	20"×6.00"-10"	21"×6.00"-10"
TYPE	TL	TL
P.R.	4	6
MAX P.S.I	20	28
LOAD(kgs/lbs)	150 / 330	121 / 265
STANDARD RIM	10"×5.0"	10"×4.5"
CERTIFICATION	DOT; E4	DOT; E4

MODEL	A-035R	
SIZE	18"×10.00"-8"	20"×11.00"-9"
TYPE	TL	TL
P.R.	4	6
MAX P.S.I	20	28
LOAD(kgs/lbs)	121 / 265	155 / 341
STANDARD RIM	8"×8.0"	9"×9.0"
CERTIFICATION	DOT; E4	DOT; E4

A-031F/R

ATV TIRES



MODEL	A-031F	A-031R		
SIZE	20"×6.00"-10"	18"×10.00"-8"	20"×11.00"-9"	22"×11.00"-9"
TYPE	TL	TL	TL	TL
P.R.	4	4	6	4
MAX P.S.I	20	20	28	28
LOAD(kgs/lbs)	150 / 330	121 / 265	180 / 400	180 / 400
STANDARD RIM	10"×5.0"	8"×8.0"	9"×9.0"	9"×9.0"
CERTIFICATION	DOT; E4	DOT; E4	DOT; E4	DOT

UTV TIRES



A-043 UTV TIRES

SIZE	24"X8.00"R12"	24"X10.00"R12"	25"X8.00"R12"	25"X10.00"R12"	26"X9.00"R12"	26"X11.00"R12"	26"X9.00"R14"	26"X11.00"R14"
TYPE	TL	TL	TL	TL	TL	TL	TL	TL
P.R.	6	6	6	6	6	6	6	6
MAX P.S.I	25	25	25	25	25	25	25	25
LOAD(kgs/lbs)	190 / 420	235 / 517	190 / 420	235 / 517	265 / 583	315 / 693	255 / 560	300 / 660
STANDARD RIM	12"X6.5"	12"X8.0"	12"X6.5"	12"X8.0"	12"X7.0"	12"X9.0"	14"X7.0"	14"X9.0"
CERTIFICATION	DOT; E4	DOT; E4	DOT; E4	DOT; E4	DOT; E4	DOT; E4	DOT; E4	DOT; E4

A-033 UTV TIRES



SIZE	22"X7.00"-12"	22"X10.00"-12"	24"X8.00"-12"	24"X10.00"-11"	24"X11.00"-10"	25"X8.00"-12"
TYPE	TL	TL	TL	TL	TL	TL
P.R.	6	6	6	6	6	6
MAX P.S.I	28	28	28	28	28	28
LOAD(kgs/lbs)	290 / 638	335 / 737	290 / 638	335 / 737	335 / 737	290 / 638
STANDARD RIM	12"X5.0"	12"X8.0"	12"X6.5"	11"X8.5"	10"X9.0"	12"X6.5"
CERTIFICATION	DOT; E4	DOT; E4	DOT; E4	DOT	DOT; E4	DOT; E4

SIZE	25"X10.00"-12"	25"X11.00"-10"	26"X8.00"-12"	26"X9.00"-12"	26"X10.00"-12"	26"X11.00"-12"
TYPE	TL	TL	TL	TL	TL	TL
P.R.	6	6	6	6	6	6
MAX P.S.I	28	28	28	28	28	28
LOAD(kgs/lbs)	335 / 737	335 / 737	300 / 660	290 / 638	300 / 660	335 / 737
STANDARD RIM	12"X8.0"	10"X9.0"	12"X6.0"	12"X7.0"	12"X8.0"	12"X9.0"
CERTIFICATION	DOT; E4	DOT	DOT; E4	DOT; E4	DOT; E4	DOT; E4

SIZE	26"X9.00"-14"	26"X11.00"-14"	27"X9.00"-12"	27"X12.00"-12"	27"X9.00"-14"	27"X11.00"-14"	28"X9.00"-12"	28"X9.00"-12"	29"X9.00"-14"	29"X9.00"-14"	29"X11.00"-14"	29"X11.00"-14"
TYPE	TL	TL	TL	TL	TL	TL	TL	TL	TL	TL	TL	TL
P.R.	6	6	6	6	6	6	6	8	6	8	6	8
MAX P.S.I	28	28	28	28	28	28	28	28	28	28	28	28
LOAD(kgs/lbs)	290 / 638	335 / 737	290 / 638	335 / 737	290 / 638	335 / 737	290 / 638	335 / 737	290 / 638	335 / 737	335 / 737	380 / 836
STANDARD RIM	14"X7.0"	14"X9.0"	12"X7.0"	12"X9.0"	14"X8.0"	14"X9.0"	12"X7.0"	12"X7.0"	14"X7.0"	14"X7.0"	14"X9.0"	14"X9.0"
CERTIFICATION	DOT; E4	DOT; E4	DOT	DOT	DOT; E4	DOT; E4	DOT	DOT	DOT	DOT	DOT	DOT



A-050 UTV TIRES

SIZE	27"X10.00"-12"	27"X12.00"-12"	28"X10.00"-12"	28"X12.00"-12"
TYPE	TL	TL	TL	TL
P.R.	6	6	6	6
MAX P.S.I	28	28	28	28
LOAD(kgs/lbs)	290 / 638	335 / 737	290 / 638	335 / 737
STANDARD RIM	12"X7.0"	12"X9.0"	12"X7.0"	12"X9.0"
CERTIFICATION	DOT	DOT	DOT	DOT



A-040 UTV TIRES

SIZE	25"×8.00"-12"	25"×10.00"-12"	26"×9.00"-12"	26"×11.00"-12"
TYPE	TL	TL	TL	TL
P.R.	6	6	6	6
MAX P.S.I	28	28	28	28
LOAD(kgs/lbs)	290 / 638	335 / 737	290 / 638	335 / 737
STANDARD RIM	12"×6.5"	12"×8.0"	12"×7.0"	12"×9.0"
CERTIFICATION	DOT; E4	DOT; E4	DOT; E4	DOT; E4



WARRIOR A-048

SIZE	26"×9.00"-12"	26"×11.00"-12"
TYPE	TL	TL
P.R.	6	6
MAX P.S.I	28	28
LOAD(kgs/lbs)	290 / 638	335 / 737
STANDARD RIM	12"×7.0"	12"×9.0"
CERTIFICATION	DOT; E4	DOT; E4



A-045

SIZE	30"×10.00"R14"	
TYPE	TL	TL
P.R.	6	8
MAX P.S.I	28	28
LOAD(kgs/lbs)	363/800	454/1000
STANDARD RIM	14"×8.0"	14"×8.0"
CERTIFICATION	DOT	DOT



A-047

SIZE	28"×10.00"-14"		30"×10.00"-15"	
TYPE	TL	TL	TL	TL
P.R.	6	8	6	8
MAX P.S.I	28	28	28	28
LOAD(kgs/lbs)	335/773	450/990	335/773	450/990
STANDARD RIM	14"×8.0"	14"×8.0"	15"×8.0"	15"×8.0"
CERTIFICATION	DOT	DOT	DOT	DOT

ATV TIRES

The right tire can make all the difference between the honer



A-024-1 UTV TIRES

SIZE	25"×8.00"-12"	25"×10.00"-12"
TYPE	TL	TL
P.R.	6	6
MAX P.S.I	28	28
LOAD(kgs/lbs)	150 / 330	175 / 385
STANDARD RIM	12"×6.5"	12"×8.0"
CERTIFICATION	DOT; E4	DOT; E4



A-024 UTV TIRES

SIZE	22"×11.00"-9"	23"×8.00"-11"	25"×8.00"-12"	25"×10.00"-12"
TYPE	TL	TL	TL	TL
P.R.	6	6	6	6
MAX P.S.I	28	28	28	28
LOAD(kgs/lbs)	175 / 385	150 / 330	150 / 330	175 / 385
STANDARD RIM	9"×9.0"	11"×6.5"	12"×6.5"	12"×8.0"
CERTIFICATION	DOT	DOT	DOT; E4	DOT; E4



A-010 UTV TIRES

SIZE	25"×8.00"-12"	25"×10.00"-12"	25"×11.00"-12"
TYPE	TL	TL	TL
P.R.	6	6	6
MAX P.S.I	20	20	20
LOAD(kgs/lbs)	150 / 330	175 / 385	180 / 400
STANDARD RIM	12"×6.5"	12"×8.0"	12"×9.0"
CERTIFICATION	DOT; E4	DOT; E4	DOT; E4



ISO9001:2000

CCC

DOT

E4



A-041

SIZE	24"×8.00"-12"	24"×10.00"-11"	25"×8.00"-12"	25"×10.00"-12"
TYPE	TL	TL	TL	TL
P.R.	6	6	6	6
MAX P.S.I	28	28	28	28
LOAD(kgs/lbs)	290 / 638	335 / 737	290 / 638	335 / 737
STANDARD RIM	12"×6.5"	11"×8.0"	12"×6.5"	12"×8.0"
CERTIFICATION	DOT; E4	DOT	DOT; E4	DOT; E4



A-032

SIZE	25"×8.00"-12"	25"×10.00"-12"
TYPE	TL	TL
P.R.	6	6
MAX P.S.I	28	28
LOAD(kgs/lbs)	290 / 638	335 / 737
STANDARD RIM	12"×6.5"	12"×8.0"
CERTIFICATION	DOT; E4	DOT; E4



A-036

SIZE	22"×10.00"-9"
TYPE	TL
P.R.	4
MAX P.S.I	20
LOAD(kgs/lbs)	180 / 395
STANDARD RIM	9"×8.0"
CERTIFICATION	DOT




A-026(3)

SIZE	21.5"×8.00"-10"	27"×11.00"-14"
TYPE	TL	TL
P.R.	4	6
MAX P.S.I	36	25
LOAD(kgs/lbs)	121 / 265	370 / 816
STANDARD RIM	10"×6.5"	14"×9.0"
CERTIFICATION	DOT	DOT




A-026(2)

SIZE	25"×8.00"-12"
TYPE	TL
P.R.	6
MAX P.S.I	36
LOAD(kgs/lbs)	150 / 330
STANDARD RIM	12"×6.5"
CERTIFICATION	DOT

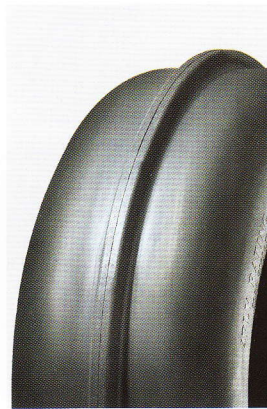

A-026(1)

SIZE	21"×7.00"-10"
TYPE	TL
P.R.	4
MAX P.S.I	20
LOAD(kgs/lbs)	121 / 265
STANDARD RIM	10"×5.5"
CERTIFICATION	DOT

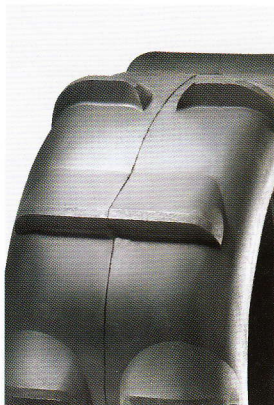

A-025(2)

SIZE	25"×10.00"-12"
TYPE	TL
P.R.	6
MAX P.S.I	30
LOAD(kgs/lbs)	180 / 400
STANDARD RIM	12"×8.0"
CERTIFICATION	DOT



A-025(1)

SIZE	22"×10.00"-10"	22"×11.00"-10"	27"×14.00"-14"
TYPE	TL	TL	TL
P.R.	6	4	6
MAX P.S.I	25	28	25
LOAD(kgs/lbs)	163 / 358	175 / 385	424 / 933
STANDARD RIM	10"×8"	10"×9"	14"×12"
CERTIFICATION	DOT	DOT	DOT



A-030

SIZE	22"×10.00"-8"	22"×11.00"-8"
TYPE	TL	TL
P.R.	2	4
MAX P.S.I	36	36
LOAD(kgs/lbs)	115 / 255	115 / 255
STANDARD RIM	8"×8.0"	8"×8.0"
CERTIFICATION	DOT	DOT;E4



A-029

SIZE	20"×7.00"-8"
TYPE	TL
P.R.	2
MAX P.S.I	36
LOAD(kgs/lbs)	100 / 220
STANDARD RIM	8"×5.5"
CERTIFICATION	DOT



A-028

ATV TIRES

SIZE	22"×10.00"-10"	22"×12.00"-9"	23"×7.00"-10"	23"×10.00"-10"
TYPE	TL	TL	TL	TL
P.R.	4	6	4	4
MAX P.S.I	20	36	20	20
LOAD(kgs/lbs)	121 / 265	180 / 396	121 / 265	121 / 265
STANDARD RIM	10"×8.0"	9"×10.0"	10"×5.5"	10"×8.0"
CERTIFICATION	DOT	DOT	DOT; E4	DOT



A-027R **ATV TIRES**



SIZE	20"×10.00"-9"	20"×11.00"-8"	20"×11.00"-9"	22"×10.00"-9"	22"×10.00"-10"	22"×11.00"-9"
TYPE	TL	TL	TL	TL	TL	TL
P.R.	6	6	6	6	6	6
MAX P.S.I	25	36	36	25	25	36
LOAD(kgs/lbs)	140 / 309	155 / 341	155 / 341	163 / 358	163 / 358	180 / 396
STANDARD RIM	9"×8.0"	8"×8.0"	9"×9.0"	9"×8.0"	10"×8.0"	9"×9.0"
CERTIFICATION	DOT; E4	DOT	DOT; E4	DOT	DOT; E4	DOT; E4

A-027F **ATV TIRES**




A-027(R) **A-027(B)** **A-027(Y)** **A-027(G)** **A-027(O)**

SIZE	21"×7.00"-10"	22"×7.00"-10"	22"×7.00"-11"	23"×7.00"-10"
TYPE	TL	TL	TL	TL
P.R.	6	6	6	6
MAX P.S.I	36	36	36	20
LOAD(kgs/lbs)	106 / 233	155 / 341	155 / 341	121 / 265
STANDARD RIM	10"×5.5"	10"×5.5"	11"×5.5"	10"×5.5"
CERTIFICATION	DOT; E4	DOT; E4	DOT	DOT; E4



A-017

SIZE	20"×6.00"-10"	21"×7.00"-10"	22"×7.00"-10"
TYPE	TL	TL	TL
P.R.	4	4	4
MAX P.S.I	15	20	20
LOAD(kgs/lbs)	121 / 265	121 / 265	121 / 265
STANDARD RIM	10"×4.5"	10"×5.5"	10"×5.5"
CERTIFICATION	DOT; E4	DOT; E4	DOT; E4

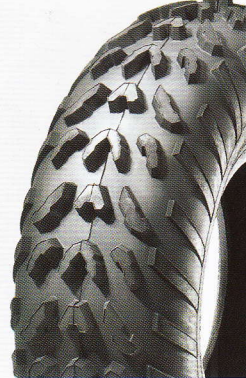

A-007

SIZE	20"×7.00"-8"	23"×7.00"-10"
TYPE	TL	TL
P.R.	4	4
MAX P.S.I	20	20
LOAD(kgs/lbs)	100 / 220	121 / 265
STANDARD RIM	8"×5.5"	10"×5.5"
CERTIFICATION	DOT; E4	DOT; E4



A-008

SIZE	22"×10.00"-10"
TYPE	TL
P.R.	4
MAX P.S.I	20
LOAD(kgs/lbs)	175 / 385
STANDARD RIM	10"×8.0"
CERTIFICATION	DOT; E4



A-006

SIZE	22"×10.00"-10"
TYPE	TL
P.R.	4
MAX P.S.I	20
LOAD(kgs/lbs)	175 / 385
STANDARD RIM	10"×8.0"
CERTIFICATION	DOT; E4



A-005

ATV TIRES

SIZE	18"×10.50"-9"	22"×11.00"-10"
TYPE	TL	TL
P.R.	4	4
MAX P.S.I	15	20
LOAD(kgs/lbs)	175 / 385	175 / 385
STANDARD RIM	9"×8.5"	10"×9.0"
CERTIFICATION	DOT	DOT; E4



A-004 ATV TIRES




SIZE	145/70-6"	16"X6.00"-8"	16"X7.00"-8"	16"X8.00"-7"	19"X7.00"-8"	19"X9.50"-8"
TYPE	TL	TL	TL	TL	TL	TL
P.R.	4	4	4	4	4	4
MAX P.S.I	24	24	24	20	20	15
LOAD(kgs/lbs)	75 / 165	80 / 175	80 / 175	80 / 175	100 / 220	115 / 255
STANDARD RIM	6"X4.5"	8"X4.5"	8"X5.5"	7"X6.5"	8"X5.5"	8"X7.0"
CERTIFICATION	DOT; E4	DOT	DOT	DOT; E4	DOT	DOT

SIZE	20"X10.00"-10"	21"X8.00"-10"	21"X10.00"-10"	22"X10.00"-10"	22"X11.00"-10"	23"X7.00"-10"
TYPE	TL	TL	TL	TL	TL	TL
P.R.	6	4	4	4	4	4
MAX P.S.I	20	20	20	20	20	20
LOAD(kgs/lbs)	175 / 385	121 / 265	121 / 265	175 / 385	175 / 385	121 / 265
STANDARD RIM	10"X8.0"	10"X6.5"	10"X8.0"	10"X8.0"	10"X9.0"	10"X5.5"
CERTIFICATION	DOT; E4	DOT	DOT	DOT; E4	DOT	DOT

A-003 ATV TIRES



SIZE	18"X7.00"-8"	18"X9.50"-8"	19"X7.00"-8"	19"X9.50"-8"	20"X10.00"-8"	21"X7.00"-8"
TYPE	TL	TL	TL	TL	TL	TL
P.R.	4	4	4	4	4	4
MAX P.S.I	20	20	20	15	20	20
LOAD(kgs/lbs)	100 / 220	115 / 255	100 / 220	115 / 255	121 / 265	121 / 265
STANDARD RIM	8"X5.5"	8"X7.0"	8"X5.5"	8"X7.0"	8"X7.0"	8"X5.5"
CERTIFICATION	DOT; E4	DOT; E4	DOT; E4	DOT; E4	DOT	DOT

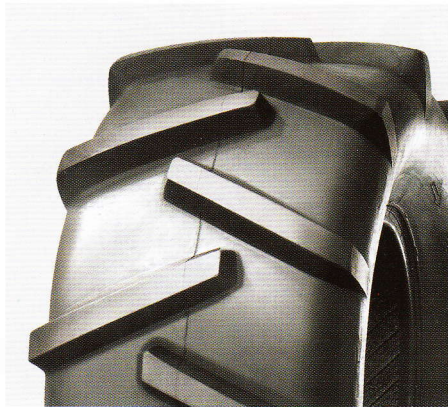

A-002 ATV TIRES

SIZE	23"×10.50"-10"	27"×14.00"-10"
TYPE	TL	TL
P.R.	6	6
MAX P.S.I	40	40
LOAD(kgs/lbs)	500 / 1100	500 / 1100
STANDARD RIM	10"×8.5"	10"×12"
CERTIFICATION	DOT	DOT



A-001 ATV TIRES

SIZE	21"×7.00"-10"	22"×7.00"-10"	22"×10.00"-10"	22"×11.00"-10"	24"×8.00"-12"	24"×11.00"-10"
TYPE	TL	TL	TL	TL	TL	TL
P.R.	4	4	4	4	4	4
MAX P.S.I	20	20	20	20	20	20
LOAD(kgs/lbs)	121 / 265	121 / 265	175 / 385	175 / 385	121 / 265	175 / 385
STANDARD RIM	10"×5.5"	10"×5.5"	10"×8.0"	10"×9.0"	12"×6.5"	10"×9.0"
CERTIFICATION	DOT; E4	DOT	DOT; E4	DOT	DOT; E4	DOT; E4

ON ROAD PATTERN



A-034 ATV TIRES

SIZE	235/30-12"	185/30-14"	270/30-14"
TYPE	TL	TL	TL
P.R.	4	4	4
MAX P.S.I	30	30	30
LOAD(kgs/lbs)	307/675	307/675	307/675
STANDARD RIM	12"×9.0"	14"×7.0"	14"×10.0"
CERTIFICATION	DOT; E4	DOT; E4	DOT; E4



ON ROAD PATTERN



A-039 ATV TIRES

SIZE	185/30-14"	235/30-14"	235/30-12"	270/30-14"
TYPE	TL	TL	TL	TL
P.R.	6	6	4	6
MAX P.S.I	30	30	30	30
LOAD(kgs/lbs)	307 / 675	307 / 675	307 / 675	307 / 675
STANDARD RIM	14"×7.0"	14"×9.0"	12"×9.0"	14"×10.0"
CERTIFICATION	DOT; E4	DOT; E4	DOT; E4	DOT; E4

A-021 ATV TIRES



SIZE	16"×8.00"-7"	18"×9.50"-8"	19"×6.00"-10"	19"×7.00"-8"	20"×7.00"-8"	20.5"×7.00"-10"
TYPE	TL	TL	TL	TL	TL	TL
P.R.	4	4	4	4	4	4
MAX P.S.I	20	20	20	20	20	20
LOAD(kgs/lbs)	80 / 175	115 / 255	100 / 220	100 / 220	121 / 265	121 / 265
STANDARD RIM	7"×6.5"	8"×7.0"	10"×4.5"	8"×5.5"	8"×5.5"	10"×5.5"
CERTIFICATION	DOT; E4	DOT; E4	DOT; E4	DOT; E4	DOT; E4	DOT; E4

SIZE	20"×10.00"-9"	20"×10.00"-10"	20.5"×10.00"-10"	21"×7.00"-10"	22"×7.00"-10"
TYPE	TL	TL	TL	TL	TL
P.R.	4	4	4	4	4
MAX P.S.I	20	20	20	20	20
LOAD(kgs/lbs)	175 / 385	150 / 330	150 / 330	121 / 265	121 / 265
STANDARD RIM	9"×8.0"	10"×8.0"	10"×8.0"	10"×5.5"	10"×5.5"
CERTIFICATION	DOT; E4	DOT; E4	DOT; E4	DOT; E4	DOT; E4

SIZE	22"×10.00"-8"	22"×10.00"-10"	23"×7.00"-10"	25"×8.00"-12"	25"×10.00"-12"
TYPE	TL	TL	TL	TL	TL
P.R.	4	4	4	6	6
MAX P.S.I	20	20	20	28	28
LOAD(kgs/lbs)	175 / 385	175 / 385	121 / 265	150 / 330	175 / 385
STANDARD RIM	8"×8.0"	10"×8.0"	10"×5.5"	12"×6.5"	12"×8.0"
CERTIFICATION	DOT	DOT; E4	DOT; E4	DOT; E4	DOT; E4

SIZE	26"×8.00"-14"	26"×10.00"-14"	205/50-10"	205/30-12"	225/45-9"	225/45-10"
TYPE	TL	TL	TL	TL	TL	TL
P.R.	6	6	4	4	6	4
MAX P.S.I	28	28	30	30	30	30
LOAD(kgs/lbs)	150 / 330	175 / 385	307 / 675	307 / 675	307 / 675	307 / 675
STANDARD RIM	14"×6.5"	14"×8.0"	10"×7.0"	12"×6.0"	9"×7.0"	10"×7.0"
CERTIFICATION	DOT; E4	DOT; E4	DOT; E4	DOT	DOT; E4	DOT; E4

KART TIRES



K-001

KART TIRES



SIZE	10"×3.60"-5"	10"×4.50"-5"	11"×4.00"-5"	11"×5.00"-5"	11"×6.00"-5"	11"×7.10"-5"	12"×8.00"-6"
TYPE	TL	TL	TL	TL	TL	TL	TL
P.R.	4	4	4	4	4	4	4
MAX P.S.I	57	57	42	57	57	57	57
LOAD(kgs/lbs)	150 / 330	150 / 330	150 / 330	150 / 330	150 / 330	150 / 330	180 / 396
STANDARD RIM	5"×3.0"	5"×4.0"	5"×3.0"	5"×4.5"	5"×4.5"	5"×6.5"	6"×10"
CERTIFICATION	DOT	DOT	DOT	DOT	DOT	DOT	DOT

NEW



RAIN TIRE

KART TIRES

SIZE	10"×4.50"-5"	11"×6.00"-5"
TYPE	TL	TL
P.R.	4	4
MAX P.S.I	57	57
LOAD(kgs/lbs)	150 / 330	150 / 330
STANDARD RIM	5"×4.0"	5"×4.0"
CERTIFICATION	DOT	DOT



MOTOCROSS TIRES



B-002F/B-001R MOTOCROSS TIRES

MODEL	B-002F		B-001R			
SIZE	80/100-21"	80/100-21"	110/100-18"	110/100-18"	110/90-19"	110/90-19"
TYPE	51M TT	70M TT	64M TT	70M TT	64M TT	70M TT
P.R.	4	6	4	6	4	6
MAX P.S.I	33	41	33	41	33	41
LOAD(kgs/lbs)	195 / 430	335 / 738	280 / 617	335 / 738	265 / 583	315 / 693
STANDARD RIM	1.85"×21"	1.85"×21"	2.50"×18"	2.50"×18"	2.50"×19"	2.50"×19"
CERTIFICATION	DOT	DOT	DOT	DOT	DOT	DOT



B-004F/B-003R MOTOCROSS TIRES

MODEL	B-004F				B-003R			
SIZE	80/100-21"	100/90-19"	110/90-18"	110/90-18"	120/90-18"	120/90-18"	120/90-19"	120/90-19"
TYPE	51M TT	57M TT	61M TT	67M TT	65M TT	71M TT	66M TT	72M TT
P.R.	4	4	4	6	4	6	4	6
MAX P.S.I	33	33	33	41	33	41	33	41
LOAD(kgs/lbs)	195 / 430	230 / 507	257 / 567	307 / 667	290 / 640	345 / 761	300 / 660	355 / 781
STANDARD RIM	1.85"×21"	2.50"×19"	2.50"×18"	2.50"×18"	2.75"×18"	2.75"×18"	2.75"×19"	2.75"×19"
CERTIFICATION	DOT	DOT	DOT	DOT	DOT	DOT	DOT	DOT

SCOOTER TIRES



D-010 SCOOTER TIRES

SIZE	120/90-10"	130/90-10"
TYPE	TL	TL
P.R.	6	6
MAX P.S.I	42	42
LOAD(kgs/lbs)	345/759	345/759
STANDARD RIM	10"×3.5"	10"×3.5"
CERTIFICATION	CCC; DOT	CCC; DOT

D-002



SIZE	3.00"-10"
TYPE	TL
P.R.	4
MAX P.S.I	36
LOAD(kgs/lbs)	150 / 330
STANDARD RIM	10"×2.5"
CERTIFICATION	CCC; DOT; E4

D-003



SIZE	3.50"-10"
TYPE	TL
P.R.	4
MAX P.S.I	36
LOAD(kgs/lbs)	195 / 429
STANDARD RIM	10"×2.5"
CERTIFICATION	CCC; DOT; E4

D-009 SCOOTER TIRES



SIZE	110/90-13"	110/90-12"	120/70-12"	120/80-14"	130/60-13"
TYPE	TL	TL	TL	TL	TL
P.R.	6	6	6	6	6
MAX P.S.I	33	33	33	33	33
LOAD(kgs/lbs)	224 / 483	224 / 483	206 / 453	236 / 517	206 / 453
STANDARD RIM	13"×2.5"	12"×2.5"	12"×3.5"	12"×2.7"	13"×3.5"
CERTIFICATION	CCC;DOT;E4	CCC;DOT;E4	CCC;DOT;E4	CCC;DOT;E4	CCC;DOT
SIZE	130/70-12"	140/60-13"	140/70-13"	140/70-12"	
TYPE	TL	TL	TL	TL	
P.R.	6	6	6	6	
MAX P.S.I	33	33	33	33	
LOAD(kgs/lbs)	224 / 483	250 / 550	250 / 550	250 / 550	
STANDARD RIM	12"×3.5"	13"×3.5"	12"×3.75"	12"×3.75"	
CERTIFICATION	CCC;DOT;E4	CCC;DOT	CCC;DOT;E4	CCC;DOT;E4	



D-006X

SIZE	120/70-12"	130/60-13"
TYPE	TL	TL
P.R.	4	4
MAX P.S.I	33	33
LOAD(kgs/lbs)	206 / 453	206 / 453
STANDARD RIM	12"×3.5"	13"×3.5"
CERTIFICATION	CCC;DOT	CCC;DOT



D-006

SIZE	130/60-13"	120/70-12"
TYPE	TL	TL
P.R.	4	4
MAX P.S.I	33	33
LOAD(kgs/lbs)	206 / 453	206 / 453
STANDARD RIM	13"×3.5"	12"×3.5"
CERTIFICATION	CCC;DOT;E4	CCC;DOT;E4



D-007 SCOOTER TIRES

SIZE	120/70-10"	120/70-10"	130/60-10"
TYPE	TL	TL	TL
P.R.	4	6	4
MAX P.S.I	33	40	20
LOAD(kgs/lbs)	180 / 396	212 / 467	195 / 430
STANDARD RIM	10"×3.0"	10"×3.0"	10"×3.5"
CERTIFICATION	DOT	DOT	DOT

TRAILER TIRES



T-006 TRAILER TIRES



SIZE	ST175/80-13"	ST175/80-13"	ST205/75-14"	ST205/75-14"
TYPE	TL	TL	TL	TL
P.R.	4	6	4	6
MAX P.S.I	36	50	36	50
LOAD(kgs/lbs)	437 / 965	500 / 1100	580 / 1280	650 / 1430
STANDARD RIM	13"×5.5"	13"×5.5"	14"×6.5"	14"×6.5"
CERTIFICATION	DOT	DOT	DOT	DOT

SIZE	ST205/75-15"	ST205/75-15"	ST225/75-15"	ST225/75-15"
TYPE	TL	TL	TL	TL
P.R.	4	6	6	8
MAX P.S.I	36	50	50	65
LOAD(kgs/lbs)	580 / 1280	650 / 1430	1000 / 2200	1150 / 2540
STANDARD RIM	15"×6.5"	15"×6.5"	15"×7.0"	15"×7.0"
CERTIFICATION	DOT	DOT	DOT	DOT




T-001

SIZE	4.80-8"
TYPE	TL
P.R.	4
MAX P.S.I	60
LOAD(kgs/lbs)	255 / 561
STANDARD RIM	8"×3.0"
CERTIFICATION	DOT



T-003

SIZE	4.00/4.80-8"	4.00/4.80-8"
TYPE	TL	TL
P.R.	4	6
MAX P.S.I	60	90
LOAD(kgs/lbs)	270 / 590	340 / 745
STANDARD RIM	8"×3.75"	8"×3.75"
CERTIFICATION	DOT	DOT

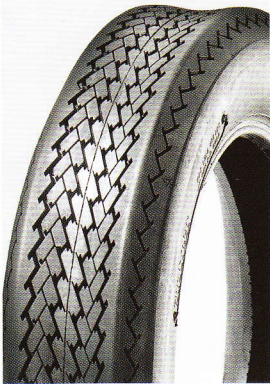

T-002

SIZE	4.80-12"
TYPE	TL
P.R.	6
MAX P.S.I	60
LOAD(kgs/lbs)	350 / 770
STANDARD RIM	12"×3.0"
CERTIFICATION	DOT



T-005

SIZE	18.5"×8.50"-8"	20.5"×8.00"-10"
TYPE	TL	TL
P.R.	6	6
MAX P.S.I	50	50
LOAD(kgs/lbs)	425 / 935	500 / 1100
STANDARD RIM	8"×6.0"	10"×6.0"
CERTIFICATION	DOT	DOT



T-004

TRAILER TIRES

SIZE	5.70-8"	5.70-8"	5.30/5.00-12"	5.30/5.00-12"
TYPE	TL	TL	TL	TL
P.R.	4	6	4	6
MAX P.S.I	50	75	55	80
LOAD(kgs/lbs)	325 / 715	415 / 910	385 / 840	475 / 1045
STANDARD RIM	8"×4.5"	8"×4.5"	12"×4.25"	12"×4.25"
CERTIFICATION	DOT	DOT	DOT	DOT

LAWN MOWER TIRES





R-016 LAWN MOWER TIRES

SIZE	13"×5.00"-6"	13"×6.50"-6"
TYPE	TL	TL
P.R.	4	4
MAX P.S.I	40	28
LOAD(kgs/lbs)	150 / 330	150 / 330
STANDARD RIM	6"×3.5"	6"×4.5"
CERTIFICATION	DOT	DOT



R-009

SIZE	4.10/3.50-4"
TYPE	TL
P.R.	4
MAX P.S.I	85
LOAD(kgs/lbs)	118 / 260
STANDARD RIM	4"×3.0"
CERTIFICATION	DOT



R-010

SIZE	13"×5.00"-6"	13"×6.50"-6"
TYPE	TL	TL
P.R.	4	4
MAX P.S.I	20	20
LOAD(kgs/lbs)	118 / 260	121 / 265
STANDARD RIM	6"×3.5"	6"×4.5"
CERTIFICATION	DOT	DOT



R-013 LAWN MOWER TIRES

SIZE	15"×6.00"-6"	18"×8.50"-8"	20"×8.00"-8"
TYPE	TL	TL	TL
P.R.	2	2	2
MAX P.S.I	14	10	20
LOAD(kgs/lbs)	80 / 175	115 / 255	115 / 255
STANDARD RIM	6"×4.5"	8"×7.0"	8"×6.5"
CERTIFICATION	DOT	DOT	DOT

SNOW THROWER TIRES



R-015

SIZE	4.10-4"	4.10-6"	13"×5.00"-6"
TYPE	TL	TL	TL
P.R.	4	4	2
MAX P.S.I	24	24	20
LOAD(kgs/lbs)	100 / 220	100 / 220	115 / 255
STANDARD RIM	4"×3.0"	6"×3.0"	6"×3.5"
CERTIFICATION	DOT	DOT	DOT



R-012

SIZE	4.10-4"	13"×5.00"-6"	13"×6.50"-6"
TYPE	TL	TL	TL
P.R.	2	4	4
MAX P.S.I	24	20	14
LOAD(kgs/lbs)	100 / 220	115 / 255	121 / 265
STANDARD RIM	4"×3.0"	6"×3.5"	6"×4.5"
CERTIFICATION	DOT	DOT	DOT

SIZE	15"×6.00"-6"	16"×6.50"-8"	18"×8.50"-8"
TYPE	TL	TL	TL
P.R.	2	4	2
MAX P.S.I	20	12	10
LOAD(kgs/lbs)	121 / 265	121 / 265	115 / 255
STANDARD RIM	6"×4.5"	8"×4.5"	8"×7.0"
CERTIFICATION	DOT	DOT	DOT

GOLF CART TIRES



G-001

GOLF CART TIRES

SIZE	18"×8.50"-8"
TYPE	TL
P.R.	4
MAX P.S.I	22
LOAD(kgs/lbs)	115 / 255
STANDARD RIM	8"×7.0"
CERTIFICATION	DOT




G-002

GOLF CART TIRES


SIZE	205/50-10"
TYPE	TL
P.R.	4
MAX P.S.I	30
LOAD(kgs/lbs)	307 / 675
STANDARD RIM	10"×6.5"
CERTIFICATION	DOT; E4

RIM SERIES




W-019

SIZE(inch)	10×8	
12×7	12×9	
14×8	14×10	



W-024

SIZE(inch)	10×7	
12×6	12×7	
12×8	14×7.5	



W-025

SIZE(inch)	12×6	
	12×8	




W-031

SIZE(inch)	12×7	12×9
14×8	14×6	




BEADLOCK WHEEL

SIZE(inch)	8×8	8×9	
9×9	10×5	10×10	
10×8	12×6	12×7	
14×6	14×7	14×8	




BEADLOCK WHEEL

SIZE(inch)	8×8	8×9	
9×9	10×5	10×10	
10×8	12×6	12×7	
14×6	14×7	14×8	



BEADLOCK WHEEL

SIZE(inch)	8×8	8×9	9×9	10×5	10×10
	10×8	12×6	12×7	14×6	14×7
				14×7	14×8



STEEL RIM WITH VALVE PROTECTION

SIZE(inch)	8×6	8×7	10×6	10×8	10×9
					12×10.5

